


SOFT CEILING LED 60X6 7527




SOFT CEILING LED 60X6

painted aluminum, plastic PMMA

 7540 7527

1xLED TUBE T8, max 11W, included

SOFT CEILING LED 60X20 7526



SOFT CEILING LED 60X20

painted aluminum, plastic PMMA

 7538 7526

2xLED TUBE T8, max 11W, included

ION LED M 8171



ION LED M

glass, chrome plated steel

 8171

SOFT CEILING LED 90X6 7533




SOFT CEILING LED 90X6

painted aluminum, plastic PMMA

 7546 7533

1xLED TUBE T8, max 16W, included

SOFT CEILING LED 90X20 7531



ION LED L 8172




ION LED L

glass, chrome plated steel

 8172

SOFT CEILING LED 120X6 7524





SOFT CEILING LED 120X6

painted aluminum, plastic PMMA

 7536 7524

1xLED TUBE T8, max 22W, included

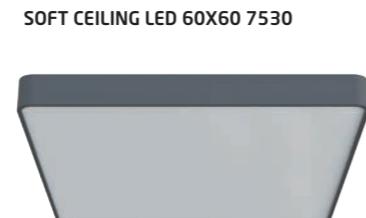

SOFT CEILING LED 60X60

painted aluminum, plastic PMMA

 7544 7530

5xLED TUBE T8, max 11W, included

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8171	12W LED	3000K	870 lm	130°	≥80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
8172	18W LED	3000K	1300 lm	130°	≥80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h